

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number
WO 2005/059994 A1

(51) International Patent Classification⁷: **H01L 23/367**,
23/467, H05K 7/20

(74) Agent: **ZEITLER, Robert, J.**; Molex Incorporated, 2222
Wellington Court, Lisle, IL 60532 (US).

(21) International Application Number:
PCT/US2004/041672

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(22) International Filing Date:
10 December 2004 (10.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
200320123779.3
11 December 2003 (11.12.2003) CN

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **MOLEX
INCORPORATED** [US/US]; 2222 Wellington Court,
Lisle, IL 60532 (US).


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **WANG, Jun-Qian**
[CN/CN]; #64 He Mu Road Da Dong Qu, Shen Yang City,
Liao Lin Province (CN).

Published:
— with international search report

[Continued on next page]

(54) Title: STRUCTURE FOR AIR CONDUCTION IN RADIATOR DEVICE

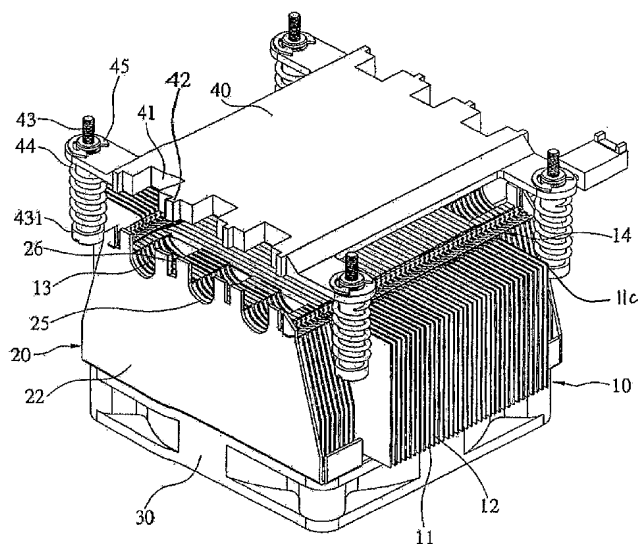

(57) Abstract: A structure for a heat-dissipating device includes a radiator, a heat dissipating plate and a fan. The radiator has plurality of radiating fins, flow passages are formed between these radiating fins which are divided into middle part and two-side parts. The lower ends of the radiating fins in two-side parts each provides at least one passageway which is connected to some of the flow passages. A heat dissipating plate includes two opposing sides which provide notches relative to the passageway of the radiator respectively. The radiator is set on the heat dissipating plate which can be set on the heat-generating component. A fan is disposed over the radiator. The structure can channel partial airflow generated by the driving fans off the radiator with the two-side flow passages and the passageway of the radiator to flow to the other heat-generating components.

WO 2005/059994 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.